


CHC 12.9 brut

DIN 912 - ISO 4762
 Filetage total

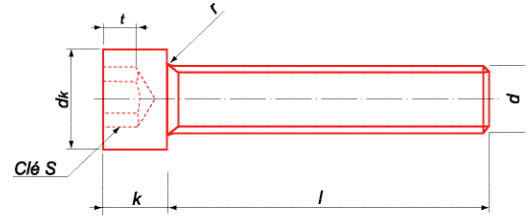

Ø	3	4	5	6	8	10	12	14	16	18	20	24
P	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	2,5	3
Dk	5,5	7	8,5	10	13	16	18	21	24	27	30	36
K	3	4	5	6	8	10	12	14	16	18	20	24
s	2,5	3	4	5	6	8	10	12	14	14	17	19
t	1,3	2	2,5	3	4	5	6	7	8	9	10	12

Ø	3	4	5	6	8	10	12	14	16	18	20	24	
Longueur sous-tête	Boîte de 200						Boîte de 100	Boîte de 50			Boîte de 25		
25	X												
30	X	X	X										
35		X	X	X									
40		X	X	X	X								
45		X	X	X	X	X							
50		X	X	X	X	X							
60			X	X	X	X	X	X					
70			X	X	X	X	X	X	X	X			
80			X	X	X	X	X	X	X	X	X		
90				X	X	X	X	X	X	X	X	X	
100				X	X	X	X	X	X	X	X	X	
110					X	X	X	X	X	X	X	X	
120					X	X	X	X	X	X	X	X	
130						X	X	X	X		X	X	
140						X	X	X	X		X	X	
150						X	X		X		X	X	
160									X		X	X	
200									X		X		
220												X	
	Boîte de 50					Boîte de 25					Boîte de 10	A l'unité	

Les caractéristiques mécaniques sont conformes à la norme ISO 898-1.