


CHC 12.9

DIN 912 - ISO 4762

Zing Nickel - Alcalin

Tenue au Brouillard Salin
 720 Heures rouille rouge

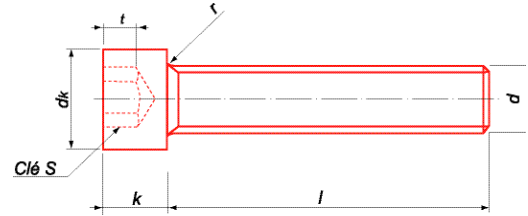

∅	4	5	6	8	10	12	14	16	18	20	24
P	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	2,5	3
Dk	7	8,5	10	13	16	18	21	24	27	30	36
K	4	5	6	8	10	12	14	16	18	20	24
s	3	4	5	6	8	10	12	14	14	17	19
t	2	2,5	3	4	5	6	7	8	9	10	12

∅	4	5	6	8	10	12	14	16	20	22	24
Longueur sous-tête	Boîte de 200				Boîte de 100	Boîte de 50			Boîte de 25	Boîte de 10	
10	X	X	X								
12	X	X	X	X							
16	X	X	X	X							
20	X	X	X	X	X						
25	X	X	X	X	X	X					
30	X	X	X	X	X	X	X	X			
35	X	X	X	X	X	X	X	X	X		
40	X	X	X	X	X	X	X	X	X		
45		X	X	X	X	X	X	X			
50		X	X	X	X	X	X	X	X		
60			X	X	X	X	X	X	X		
65						X					
70					X	X	X	X	X		
75											
80					X	X	X	X	X	X	
90						X		X	X	X	X
100						X		X	X		X
110						X		X			
120						X		X	X		
130						X					
140								X			X
150						X					
160								X	X		
180											X
200								X	X		
	Boîte de 200	Boîte de 100			Boîte de 50	Boîte de 25		A l'unité		Boîte de 10	

Les caractéristiques mécaniques sont conformes à la norme ISO 898-1.